

INTRODUCTION

The "1,500-foot" sand of the Baton Rouge area is a major source of fresh ground water in a five-parish area which includes East and West Baton Rouge, East and West Feliciana, and Pointe Coupee Parishes (hereinafter referred to as the Baton Rouge area) in southeastern Louisiana (fig. 1). In 2001, the "1,500-foot" sand was the fifth most heavily pumped aquifer of the 14 aquifers (fig. 2) underlying this area. In 2001, about 17.8 Mgal/d was withdrawn from the "1,500-foot" sand in the Baton Rouge area (fig. 3). Of this amount, about 85 percent was used for public supply and about 15 percent for industrial purposes (D.C. Dial, Capital Area Ground Water Conservation Commission, written commun., 2002). Most of the water, about 14.5 Mgal/d, was withdrawn in East Baton Rouge Parish (D.C. Dial, Capital Area Ground Water Conservation Commission, written commun., 2002). From 1990 to 2001, withdrawals from the "1,500-foot" sand decreased by about 9 percent (from about 19.5 to 17.8 Mgal/d, fig. 3) in the Baton Rouge area.

Pumpage from the "1,500-foot" sand has caused water-level declines in the Baton Rouge area (Meyer and Turcan, 1955, p. 54-57). Also, previous studies have shown that saltwater encroachment (horizontal movement) into freshwater areas has occurred in response to pumpage (Tomaszewski, 1996, p. 6; Whiteman, 1979, p. 29-35).

Additional knowledge about ground-water flow and effects of withdrawals on the "1,500-foot" sand of the Baton Rouge area is needed to assess ground-water-development potential and to protect the resource. To meet this need, the U.S. Geological Survey (USGS), in cooperation with the Capital Area Ground Water Conservation Commission (CAGWCC), began a study in 2000 to measure and document the current (2001) water levels in wells screened in the "1,500-foot" sand, construct a potentiometric-surface (water-levels) map, and to evaluate changes in the potentiometric surface.

This report presents data and maps that describe the potentiometric surface of the "1,500-foot" sand of the Baton Rouge area during the spring of 2001. Graphs of water levels in selected wells and water withdrawals from the "1,500-foot" sand are presented to show the historical changes in water levels and water use. The potentiometric-surface map illustrates the water levels and ground-water flow directions in the aquifer for spring 2001. Water-level and water-use data are on file at the USGS and CAGWCC offices in Baton Rouge, Louisiana.

Description of Study Area

The study area (fig. 1) extends across about 2,000 mi² and includes East and West Baton Rouge, East and West Feliciana, and Pointe Coupee Parishes (Calhoun and Frois, 1997, p. 153). The City of Baton Rouge and several industrial facilities are located in the study area along the Mississippi River. The climate is generally warm and temperate with high humidity and frequent rain. At Baton Rouge, the average annual temperature is 68°F, and the average annual rainfall is about 60 in. (National Oceanic and Atmospheric Administration, 1995, p. 5, 8). With the exception of the Baton Rouge metropolitan area, much of the study area is rural and agricultural.

Hydrogeologic Setting

Beneath the study area is a sequence of complexly interbedded, interconnected, lenticular, alluvial, freshwater-bearing, sandy, and graveliferous strata that form a wedge of sediment that dips and thickens in a south-to-southwest direction. Fourteen freshwater aquifers (fig. 2) in the area are composed of sediment that can contain very fine to coarse sand and pea-to-cobble-size gravel (Meyer and Turcan, 1955, p. 21-47). Thirteen of the aquifers were originally named according to their general depth in the Baton Rouge industrial district (Meyer and Turcan, 1955, p. 12-13). A prominent hydrogeologic feature in the region is the Baton Rouge fault (fig. 1) which extends from east of the study area through East and West Baton Rouge Parishes to west of the study area (Durham and Peeples, 1956; Murray, 1961, p. 189-190; Whiteman, 1979, pl. 6; McCulloh, 1991).

Precipitation in the northern part of the study area and north of the study area in Mississippi is the primary source of recharge of freshwater to the "1,500-foot" sand. Because the aquifers in the region are interconnected, some infiltrated precipitation percolates down into and through the surficial aquifers in the recharge area to deeper interconnected aquifers, which include the "1,500-foot" sand (Morgan, 1963, p. 11-13). Generally, water continues to move downward in a southerly direction through the aquifer toward the Baton Rouge fault at rates that range from a few tens of feet per year to several hundreds of feet per year (Buono, 1983, p. 24). The southern limit of freshwater in the "1,500-foot" sand generally is considered to be at or near the Baton Rouge fault (Tomaszewski, 1996, p. 6).

Development of the "1,500-foot" sand began after 1927 (Torak and Whiteman, 1982, table 4). From 1940 to 2001 water levels declined about 160 ft at well EB-168 (fig. 3). Well EB-168 is located near pumping centers in the Baton Rouge southeast of the industrial district (fig. 4). However, from 1951 to 2001 water levels at well PC-39 changed less than 27 ft (fig. 3). Although both wells are screened in the "1,500-foot" sand, well PC-39 is located near the recharge area and where little or no water withdrawals occur.

Before development, water entered the "1,500-foot" sand in the recharge area, and flowed generally in a south to southwest direction to the discharge area near the Baton Rouge fault (Meyer and Turcan, 1955, p. 51; Morgan, 1963, p. 13; Huntzinger and others, 1985, p. 8). At the discharge area, the Baton Rouge fault can act as a leaky barrier to horizontal ground-water flow (Whiteman, 1979, p. 12, 13). Also, water from the recharge area would move upward (probably along the fault) from the "1,700-foot" sand into the "1,500-foot" sand and from the "1,500-foot" sand into the "1,200-foot" sand due to vertical head² differences at the

¹Saltwater in this report is defined as water that contains chloride at concentrations of more than 250 mg/L; concentrations of chloride less than 250 mg/L are within the secondary maximum contaminant level (SMCL's are established for contaminants that can adversely affect the aesthetic quality of drinking water) of the secondary drinking water regulations. At high concentrations or values, health implications as well as aesthetic degradation might exist. SMCL's are not federally enforceable, but are intended as guidelines for the states (U.S. Environmental Protection Agency, 1977, 1992).

CONVERSION FACTORS, DATUMS, AND ABBREVIATED WATER-QUALITY UNIT


Multiply	By	To obtain
inch (in.)	25.4	millimeter (mm)
foot (ft)	0.3048	meter (m)
foot per year (ft/yr)	0.3048	meter per year (m/yr)
mile (mi)	1.609	kilometer (km)
square mile (mi ²)	2.590	square kilometer (km ²)
gallons per minute (gal/min)	0.06309	liter per second (L/s)
million gallons per day (Mgal/d)	3,785	cubic meter per day (m ³ /d)

Temperature in degrees Fahrenheit (°F) can be converted to degrees Celsius (°C) as follows: °C = (°F - 32)/1.8.

Vertical coordinate information in this report is referenced to the National Geodetic Vertical Datum of 1929 (NGVD 29)—a geodetic datum derived from a general adjustment of the first-order level nets of both the United States and Canada, formerly called Sea Level Datum of 1929.

Horizontal coordinate information in this report is referenced to the North American Datum of 1927.

Abbreviated water-quality unit:
milligrams per liter (mg/L)

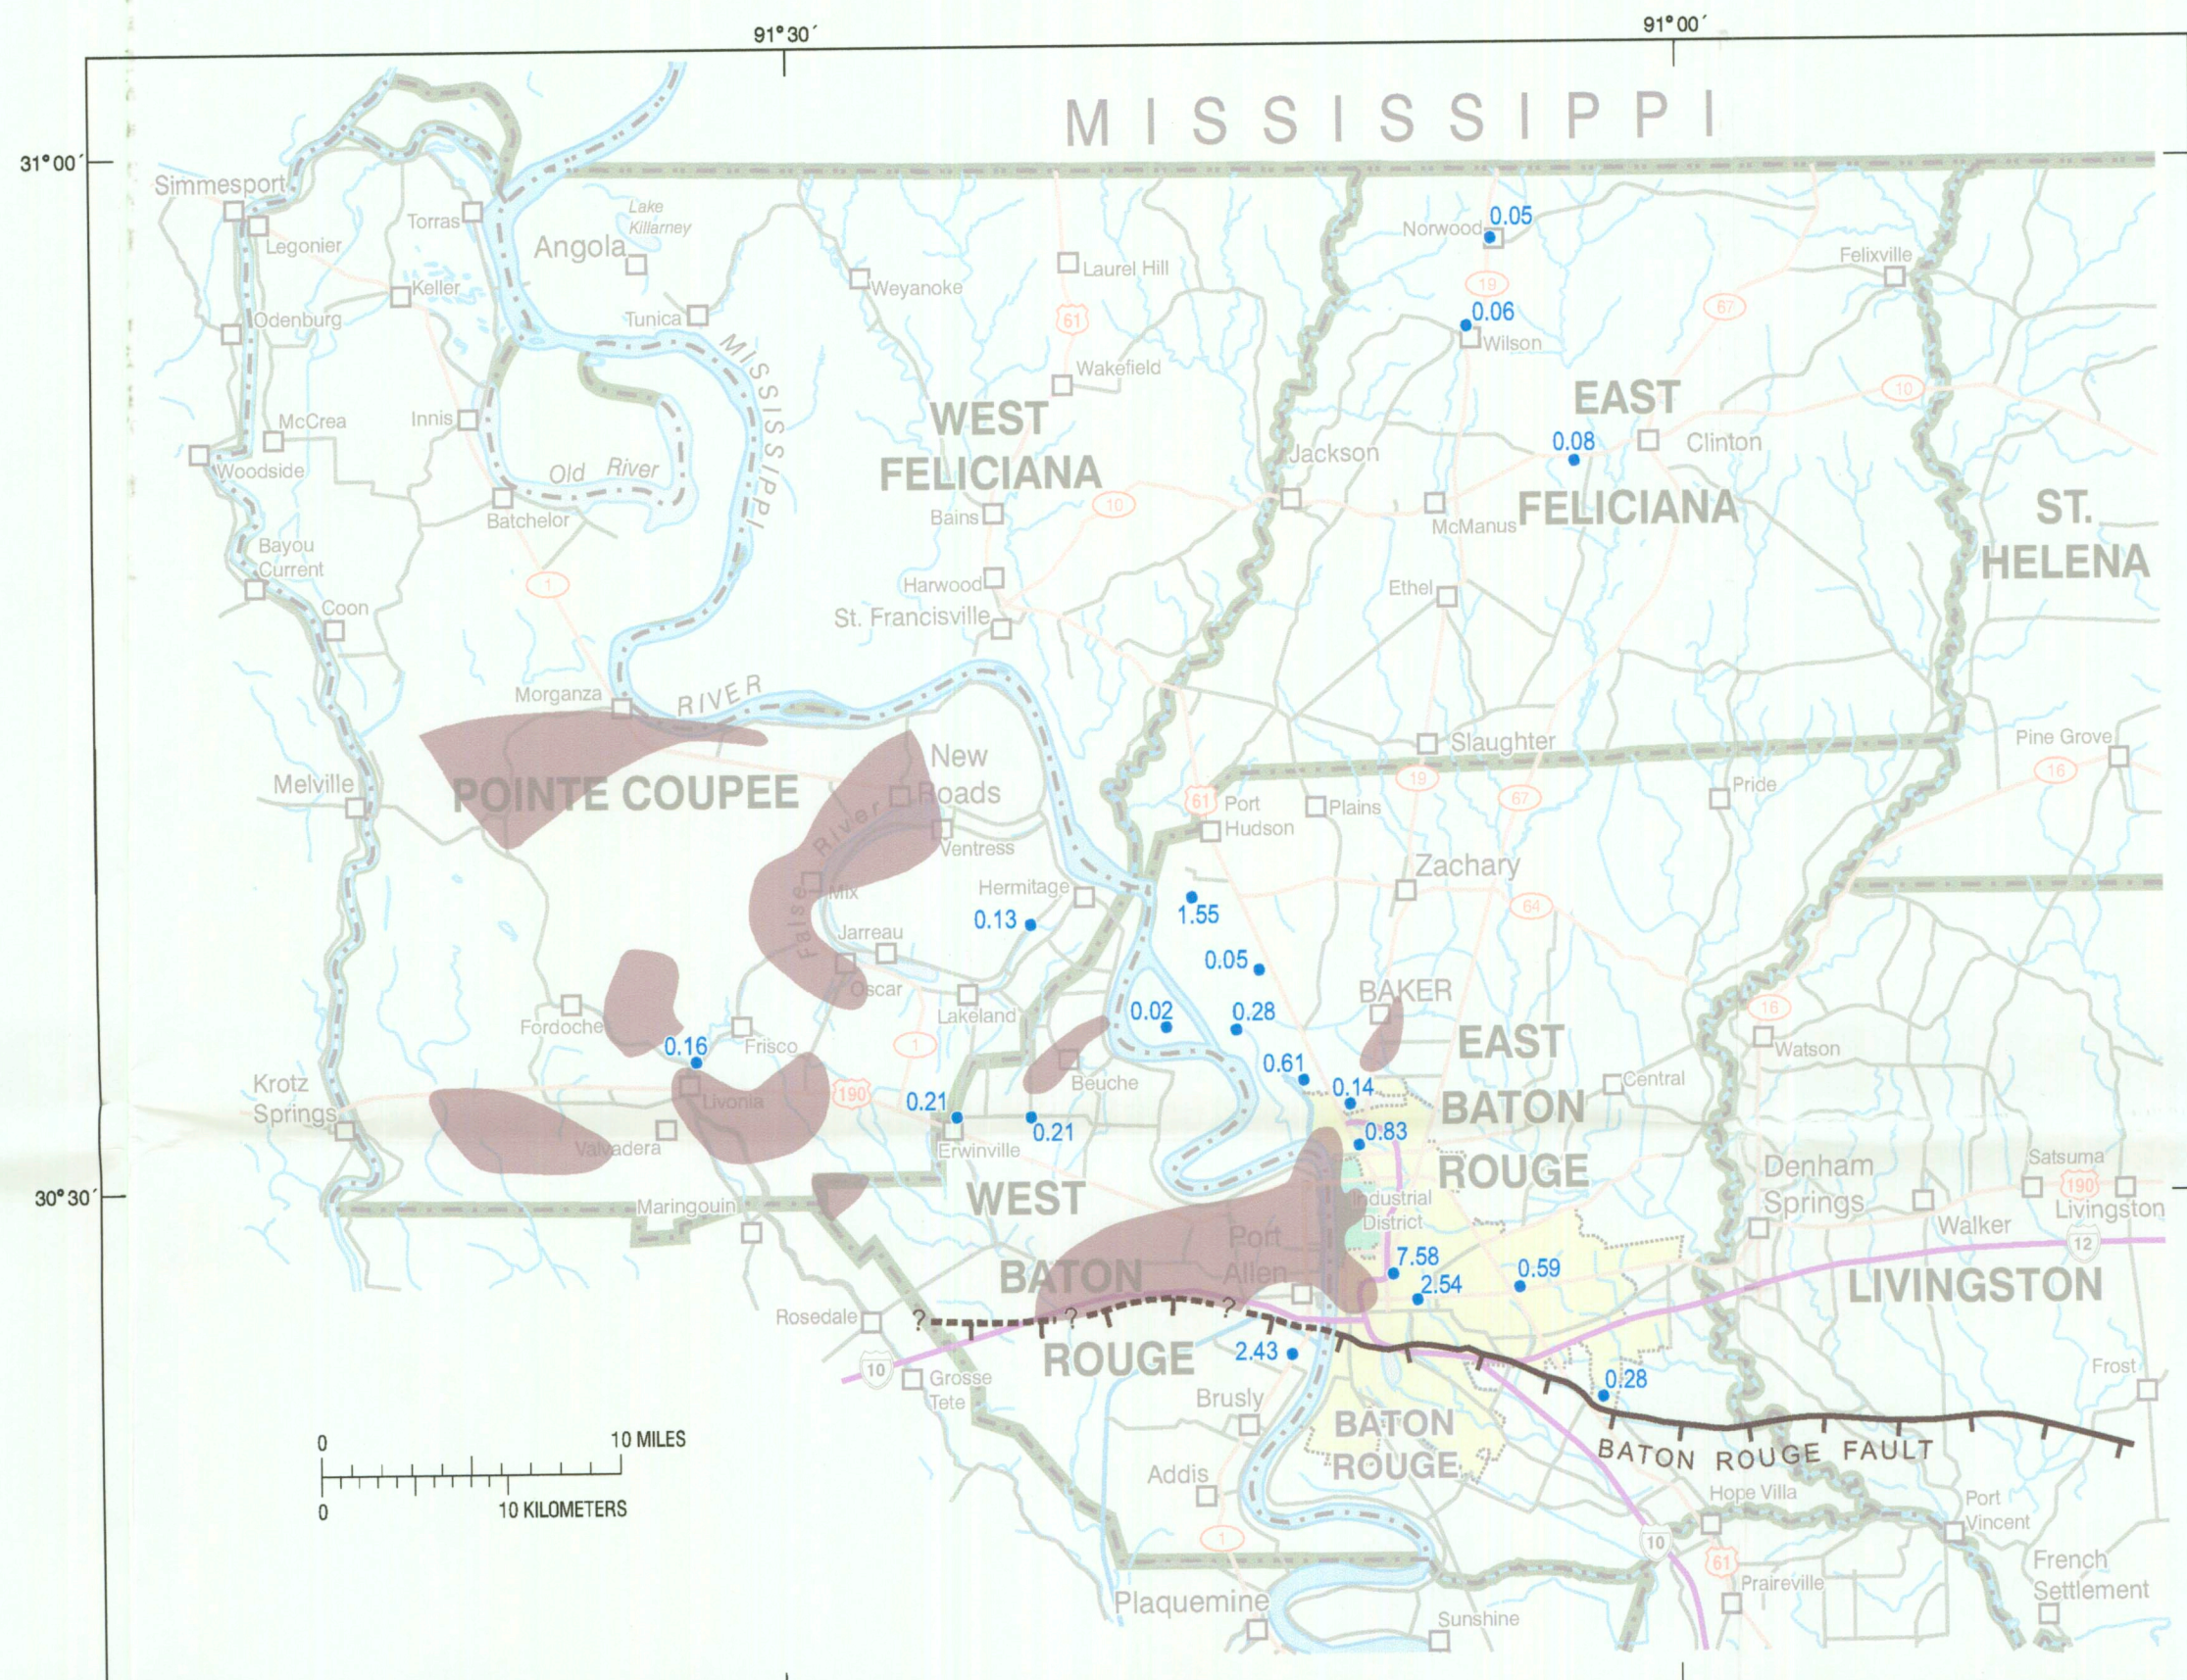

Base map modified from Louisiana Oil Spill Coordinator, Office of the Governor, Louisiana GIS CD: A Digital Map of the State, Version 2.0

Figure 1. Water withdrawals from the "1,500-foot" sand and location of the study area in the Baton Rouge area, southeastern Louisiana, 2001.

discharge area (Meyer and Turcan, 1955, p. 51; Morgan, 1963, p. 13; Huntzinger and others, 1985, p. 8). Recently, however, water withdrawals in the study area have caused water to flow toward pumping centers and reduced the vertical head gradient in what was the discharge area near the fault, and the upward movement of water has diminished (Meyer and Turcan, 1955, p. 51; Morgan, 1963, p. 13).

Large water withdrawals north of the fault might have induced saltwater encroachment from south of the fault toward pumping centers north of the fault where the "1,500-foot" sand previously contained freshwater. Tomaszewski (1996, p. 9) showed that saltwater was present in the "1,500-foot" sand north of the Baton Rouge fault in a 1.5-mi² area in the vicinity of Acadian Thruway in Baton Rouge. In 1998, in an effort to mitigate saltwater encroachment in the aquifer, the CAGWCC installed a "connector well" between municipal supply wells and the freshwater-saltwater interface in the "1,500-foot" sand. The "connector well," EB-1293, is screened in both the "800-foot" and "1,500-foot" sands. At well EB-1293, the water level in the "800-foot" sand is higher than the water level in the "1,500-foot" sand, and subsequently, 0.6 to 0.7 Mgal/d of water continuously flows through the well from the "800-foot" sand to the "1,500-foot" sand (Capital Area Ground Water Conservation Commission, 2002). Flow into the "1,500-foot" sand is expected to raise the potentiometric surface near well EB-1293 and deflect the advance of the saltwater away from the municipal supply wells.

²The altitude to which water rises (in a well) at a given point as a result of reservoir pressure (Bates and Jackson, 1984, p. 231).

System	Series	Stratigraphic unit	Aquifer ³ or confining unit
Quaternary	Holocene	Mississippi River and other alluvial deposits	Mississippi River alluvial aquifer
	Pleistocene	Unnamed Pleistocene deposits	Shallow sands
	Upland terrace aquifer		
Tertiary	Pliocene	Blounts Creek Member	"400-foot" sand
			"600-foot" sand
			"800-foot" sand
			"1,000-foot" sand
			"1,200-foot" sand
	? Miocene	Fleming Formation	"1,500-foot" sand
			"1,700-foot" sand
			Unnamed confining unit
			Castor Creek Member
			Williamson Creek Member
? Oligocene	Catahoula Formation	"2,000-foot" sand	
		"2,400-foot" sand	
		"2,800-foot" sand	
		Lena Member	Unnamed confining unit
		Catahoula Formation	Catahoula aquifer

³Clay units separating aquifers in the Baton Rouge area are discontinuous and unnamed.

Figure 2. Hydrogeologic units in the Baton Rouge area, southeastern Louisiana (modified from Stuart and others, 1994, fig. 5; Lovelace and Lovelace, 1995, fig. 1).

Louisiana Ground-Water Map No. 16: Potentiometric Surface of the "1,500-Foot" Sand of the Baton Rouge Area, Louisiana, Spring 2001

By
Jason M. Griffith and John K. Lovelace

2003

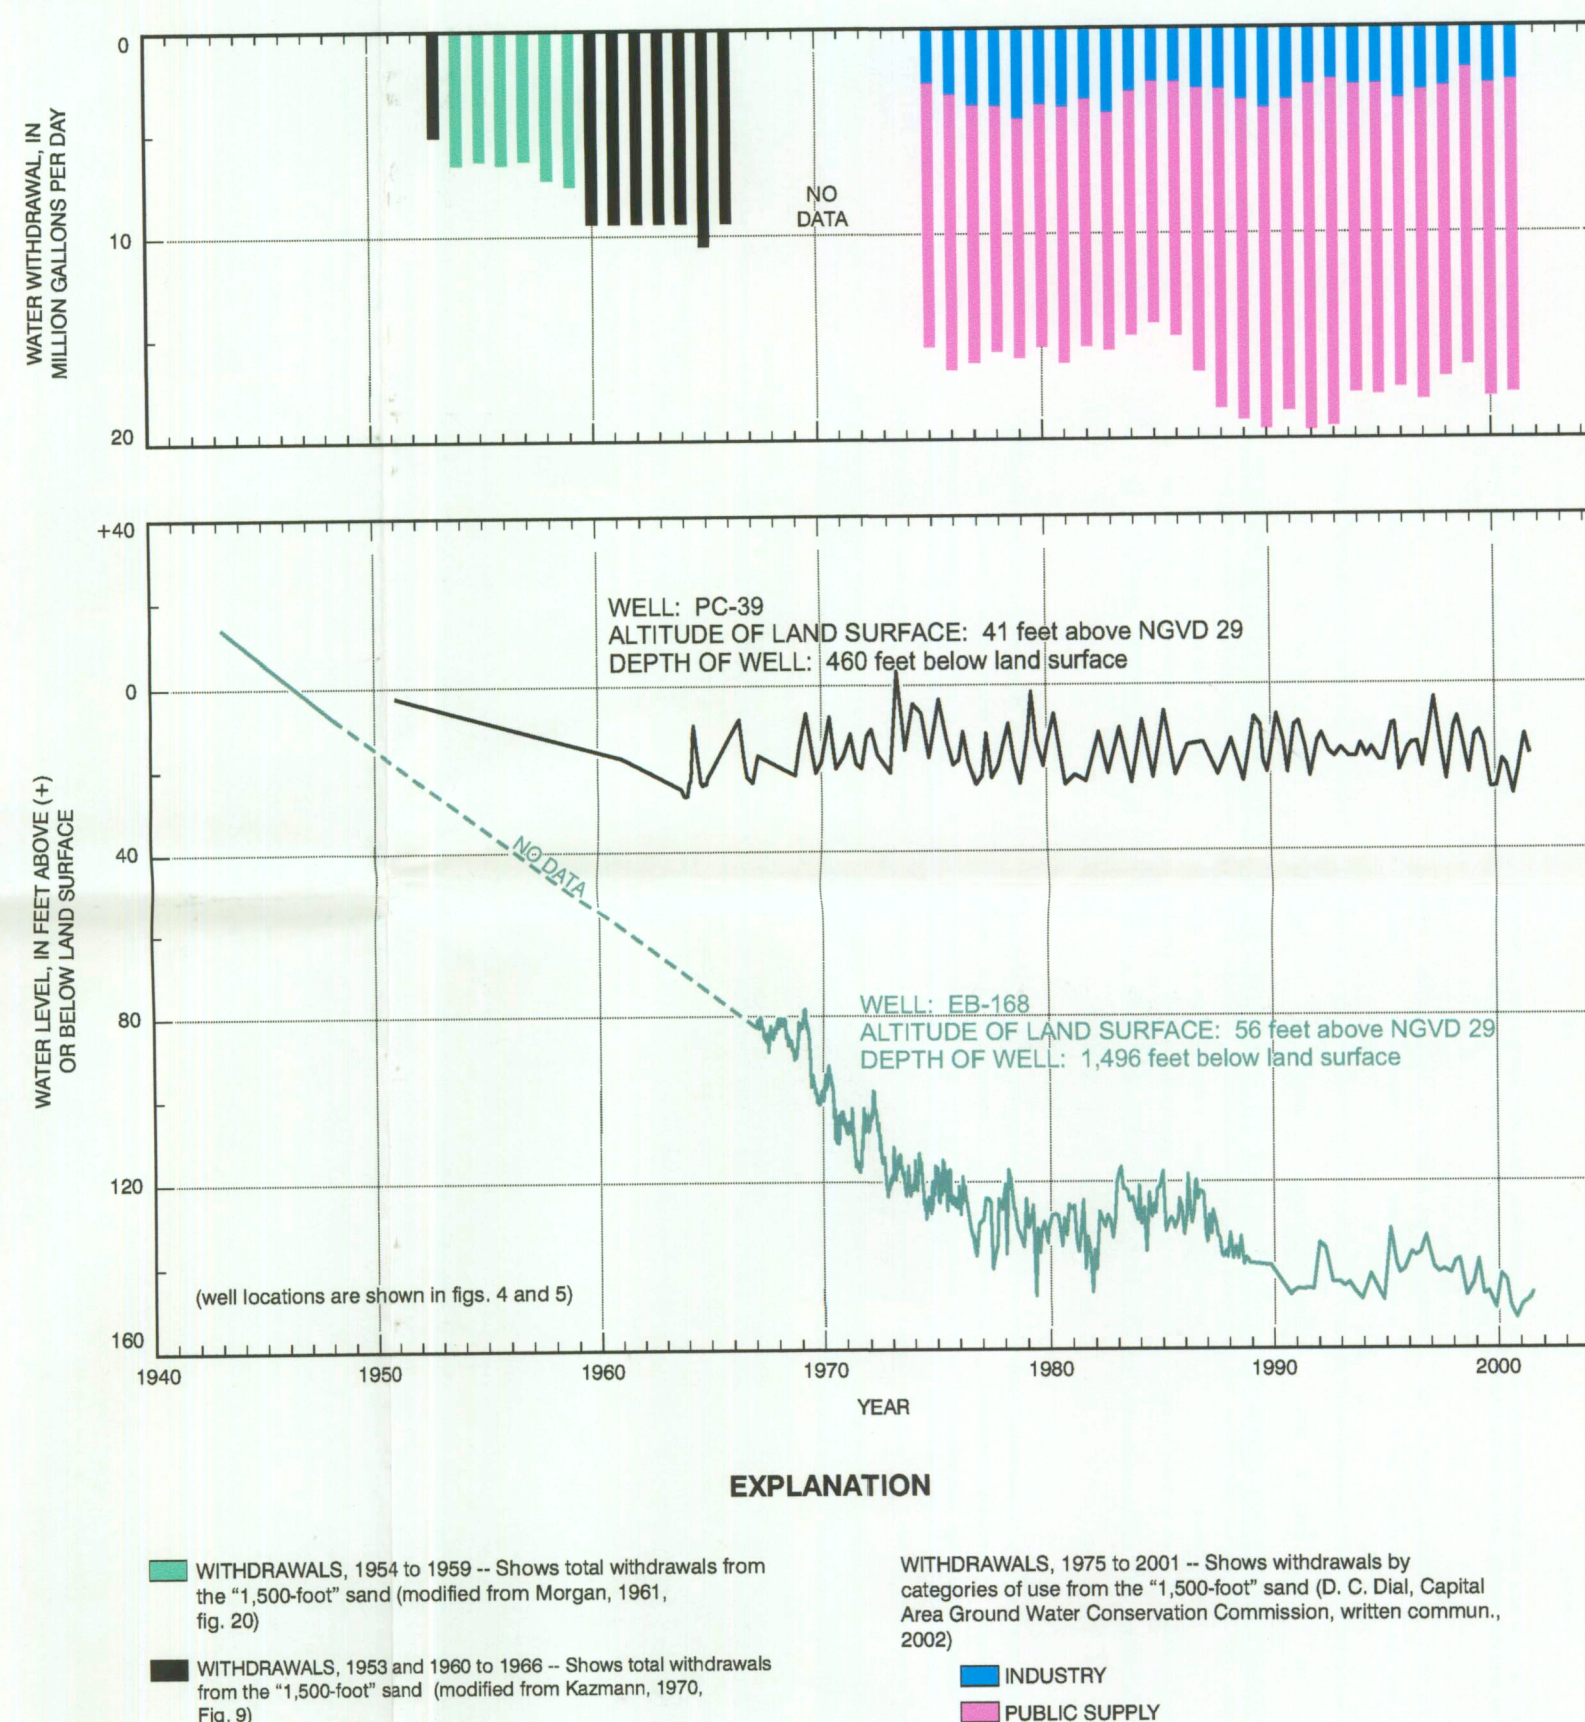


Figure 3. Water withdrawals from the "1,500-foot" sand and water levels in wells EB-168 and PC-39 in the Baton Rouge area, southeastern Louisiana.

For additional information, contact:
District Chief
U.S. Geological Survey
3535 S. Sherwood Forest Blvd., Suite 120
Baton Rouge, LA 70816
E-mail: dc_la@usgs.gov
Fax: (225) 298-5490
Telephone: (225) 298-5481
Home page: la.water.usgs.gov

Copies of this report can be purchased from:
U.S. Geological Survey
Branch of Information Services
Box 25286
Denver, CO 80225
E-mail: info@usgs.gov
Fax: (303) 202-4188
Telephone (toll free): 1-888-ASK-USGS

