

JANUARY 11, 2017

FALSE RIVER ECOSYSTEM RESTORATION – PHASE II NORTH FLATS

PROJECT REPORT

FALSE RIVER WATERSHED COUNCIL

Prepared By:



PEC
PROFESSIONAL
ENGINEERING
CONSULTANTS
CORPORATION

7600 Innovation Park Drive

Baton Rouge, LA 70820

P: 225.769.2810 | F: 225.769.2882

pecla.com














**FALSE RIVER ECOSYSTEM RESTORATION
PHASE II - NORTH FLATS**

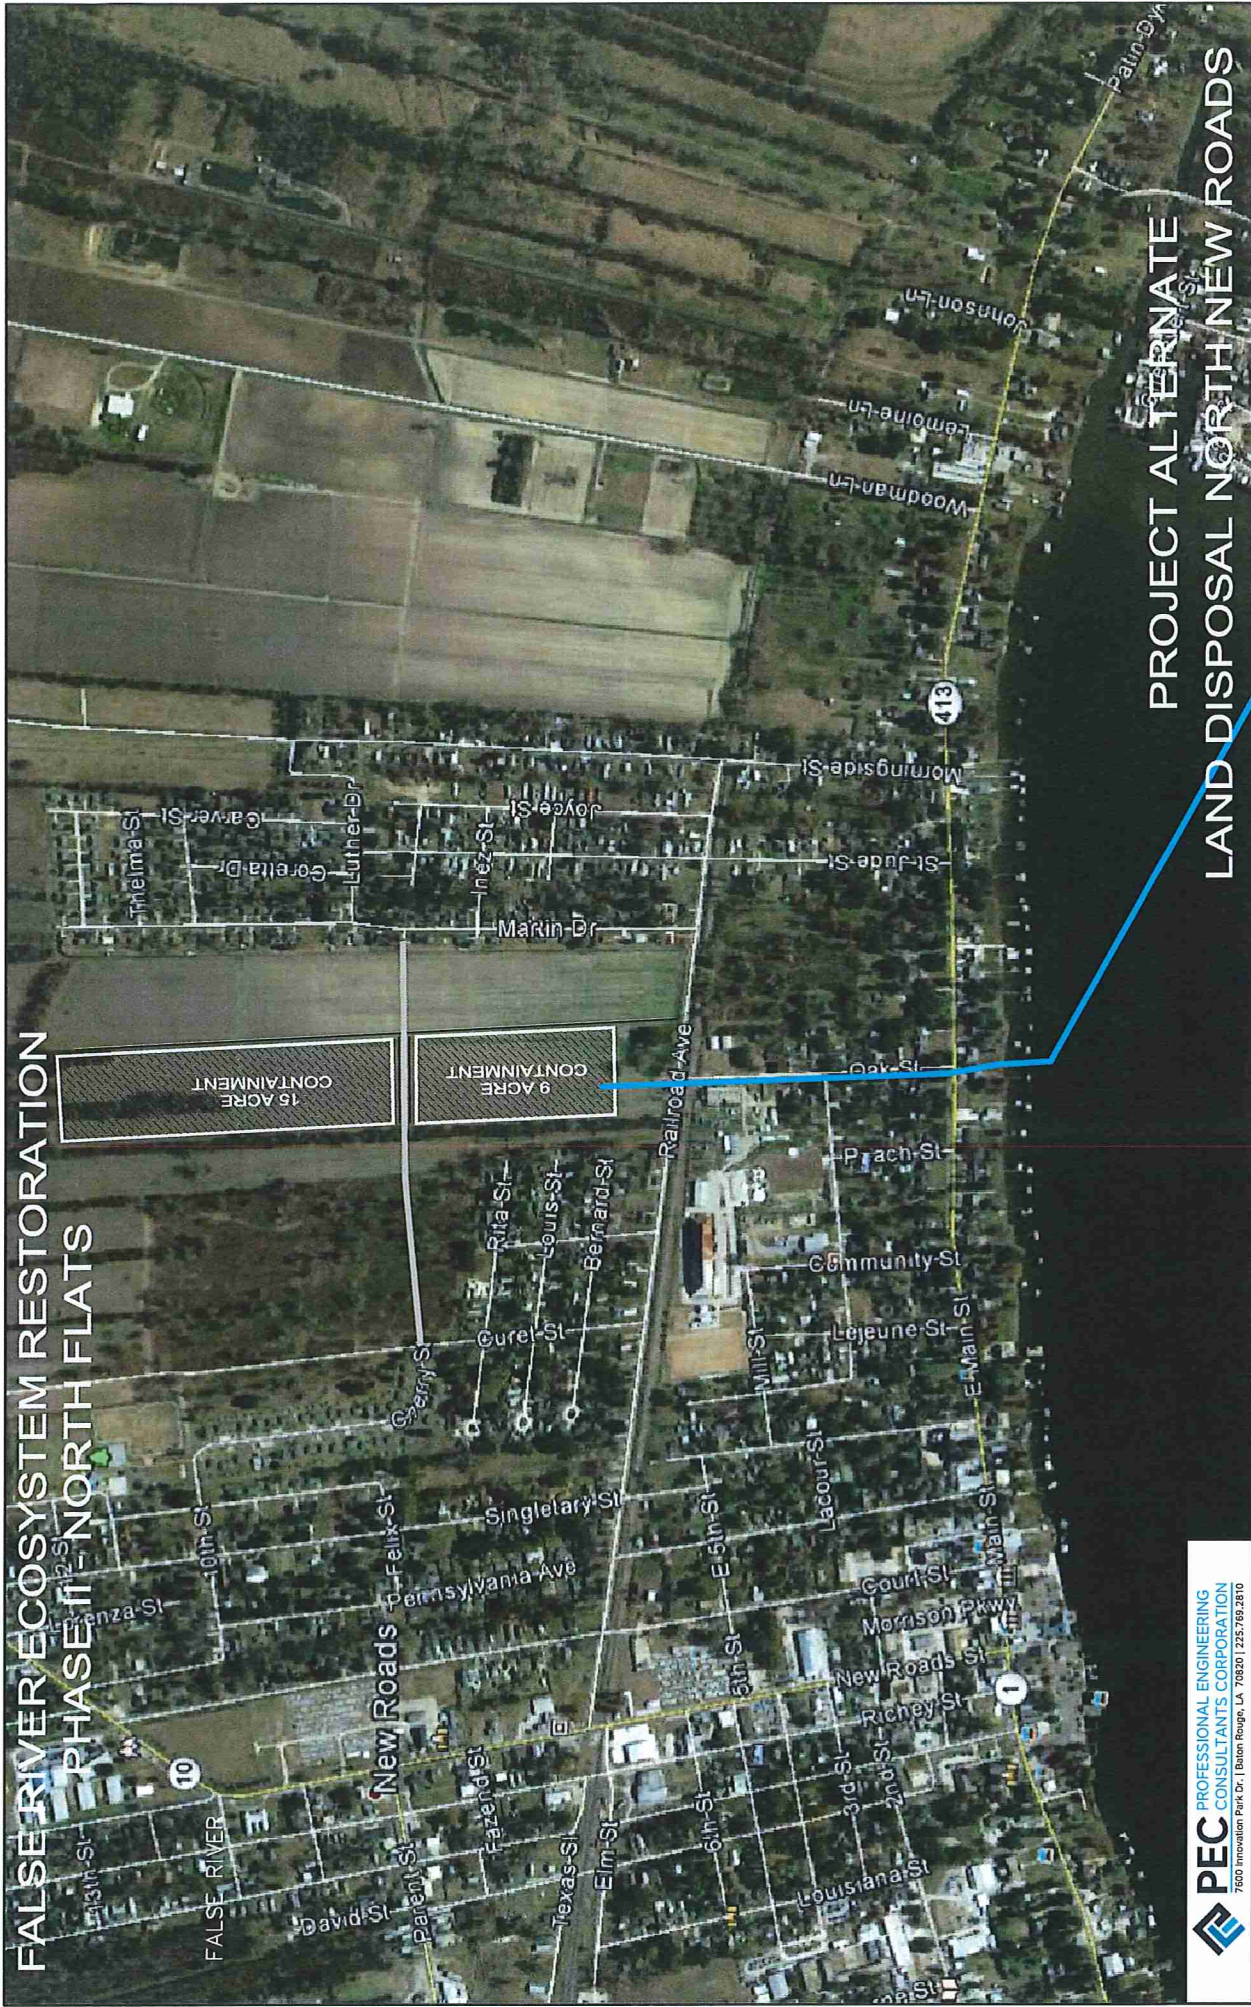

**PROJECT ALTERNATE
LAND DISPOSAL NORTH NEW ROADS**

Estimate of Construction Costs

FALSE RIVER ECOSYSTEM RESTORATION
 PHASE 2- NORTH FLATS
 LAND DISPOSAL 24 ACRES IN NORTH NEW ROADS

DATE:

1/10/2017

<i>ITEM</i>	<i>QUANTITY</i>	<i>UNIT</i>	<i>UNIT COST</i>	<i>EXTENSION</i>
MOBILIZATION AND DEMOBILIZATION	1	LUMP SUM	\$200,000.00	\$200,000.00
CONSTRUCTION SURVEYS	1	LUMP SUM	\$50,000.00	\$50,000.00
EARTHEN CONTAINMENT DIKE	4,050	LINEAR FOOT	\$60.00	\$243,000.00
PIPELINE INSTALLATION AND REMOVAL (ON GROUND)	3,530	LINEAR FOOT	\$12.00	\$42,360.00
PIPELINE INSTALLATION AND REMOVAL (DIRECTIONAL DRILL)	1,000	LINEAR FOOT	\$75.00	\$75,000.00
HYDRAULIC DREDGING	200,000	CUBIC YARD	\$5.50	\$1,100,000.00
Total Estimated Construction				\$1,710,360.00

PREPARED BY



PEC
 PROFESSIONAL
 ENGINEERING
 CONSULTANTS
 CORPORATION

600 Innovation Park Drive
 Baton Rouge, LA 70820

P: 225.769.2810

F: 225.769.2882

PECLA.com

FALSE RIVER ECOSYSTEM RESTORATION
PHASE II - NORTH FLATS



PROJECT ALTERNATE
SEDIMENT DISPOSAL IN MISSISSIPPI RIVER

Estimate of Construction Costs

**FALSE RIVER ECOSYSTEM RESTORATION
PHASE 2 - NORTH FLATS
SEDIMENTS DISCHARGED INTO THE MISSISSIPPI RIVER**

DATE:

12/7/2016

<i>ITEM</i>	<i>QUANTITY</i>	<i>UNIT</i>	<i>UNIT COST</i>	<i>EXTENSION</i>
Mobilization & Demobilization	1	Lump Sum	\$375,000.00	\$375,000.00
Construction Surveys	1	Lump Sum	\$25,000.00	\$25,000.00
Pipeline Installation and Removal	27,000	Linear Foot	\$11.25	\$303,750.00
Hydraulic Dredging	200,000	Cubic Yard	\$6.00	\$1,200,000.00
Total Estimated Construction				\$1,903,750.00

PREPARED BY:



PEC
PROFESSIONAL
ENGINEERING
CONSULTANTS
CORPORATION